



BIM 360://WUSM NRBWUSM_RB_HPF.rvt
10/22/2021 8:26:03 AM

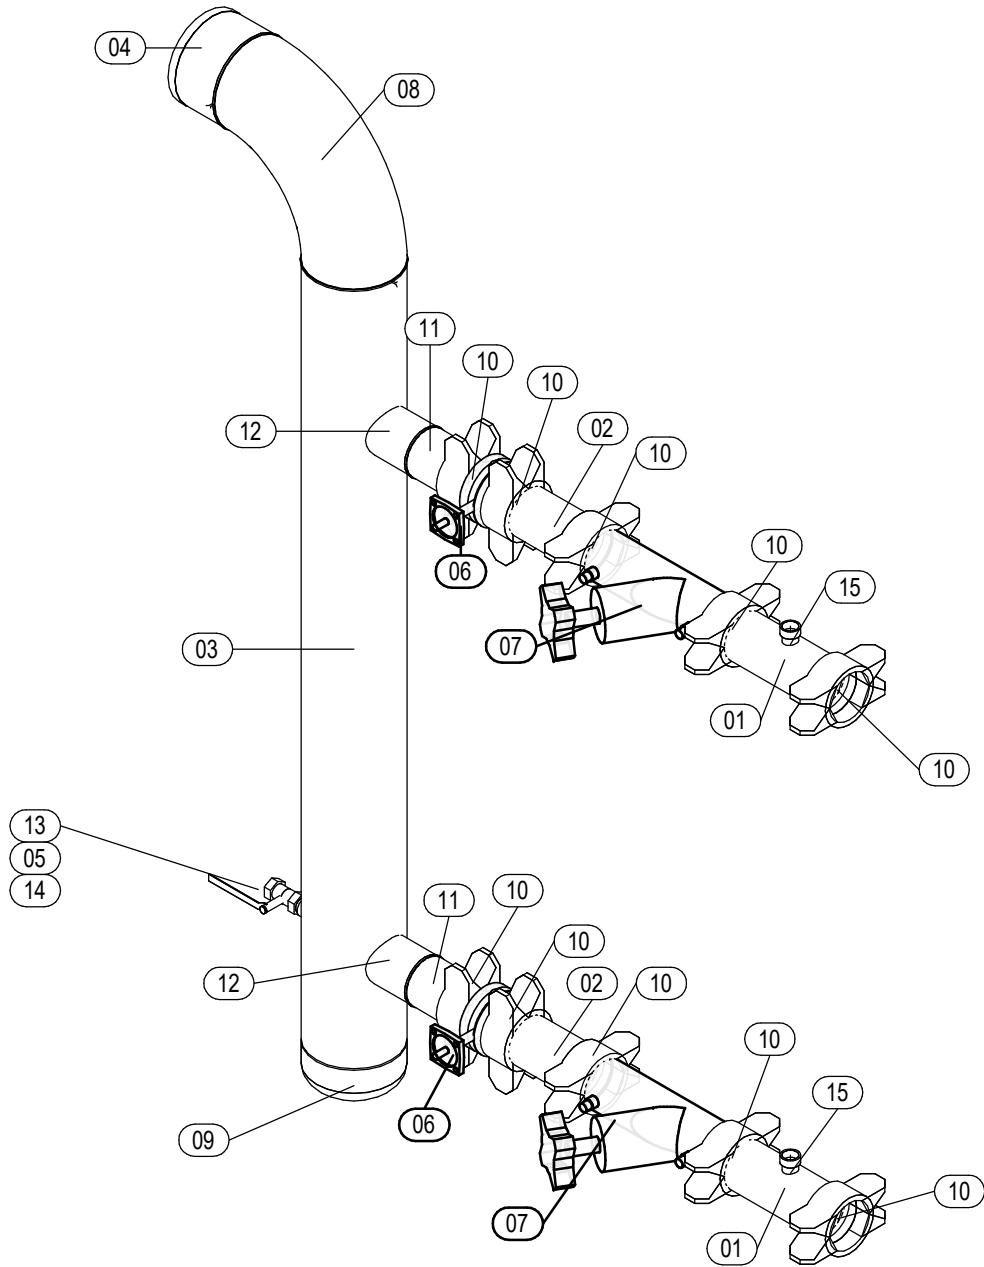

3D Ortho25


Mark	Qty	Description	Size	Length	Insulation
01	2	Chicago Area Sch 40 SA-53B CS ERW Pipe PE	3"	0'-9 3/16"	1"
02	2	Chicago Area Sch 40 SA-53B CS ERW Pipe PE	3"	0'-6 9/16"	1"
03	1	Chicago Area Sch 40 SA-53B CS ERW Pipe PE	6"	4'-11 9/16"	1"
04	1	Chicago Area Sch 40 SA-53B CS ERW Pipe PE	6"	0'-4"	1"
05	1	Anvil Std SA-53B CS Smls Pipe NIP x Close	3/4"	0'-1 3/8"	1"
06	2	VIC-300 MASTERSEAL BUTTERFLY VALVE BARE	3"		0"
07	2	VIC TA CIRCUIT BALANCING VALVE SERIES 789 (GRVD)	3"		0"
08	1	Weldbend Std Wt SA234 WPB CS BW LR 90 Deg Ell	6"		1"
09	1	Weldbend Std Wt SA234 WPB CS BW Cap	6"		1"
10	10	Victaulic Style 177N QuickVic EHP Pnt Flexible Cpl	3"		1"
11	2	Victaulic No 42 Adapter Nipple GrvxBev	3"		1"
12	2	Southern California Area Sch 40 SA-53B CS ERW Pipe Saddle	6"x3"		1"
13	1	Apollo 77C-140 Brz 2pc FP SS-Vntd-B&S Ball Valve Thd	3/4"		1"
14	1	Anvil 3000# FS Thread-O-Let	6"x3/4"		1"
15	2	Anvil 3000# FS Thread-O-Let	3"x3/4"		1"

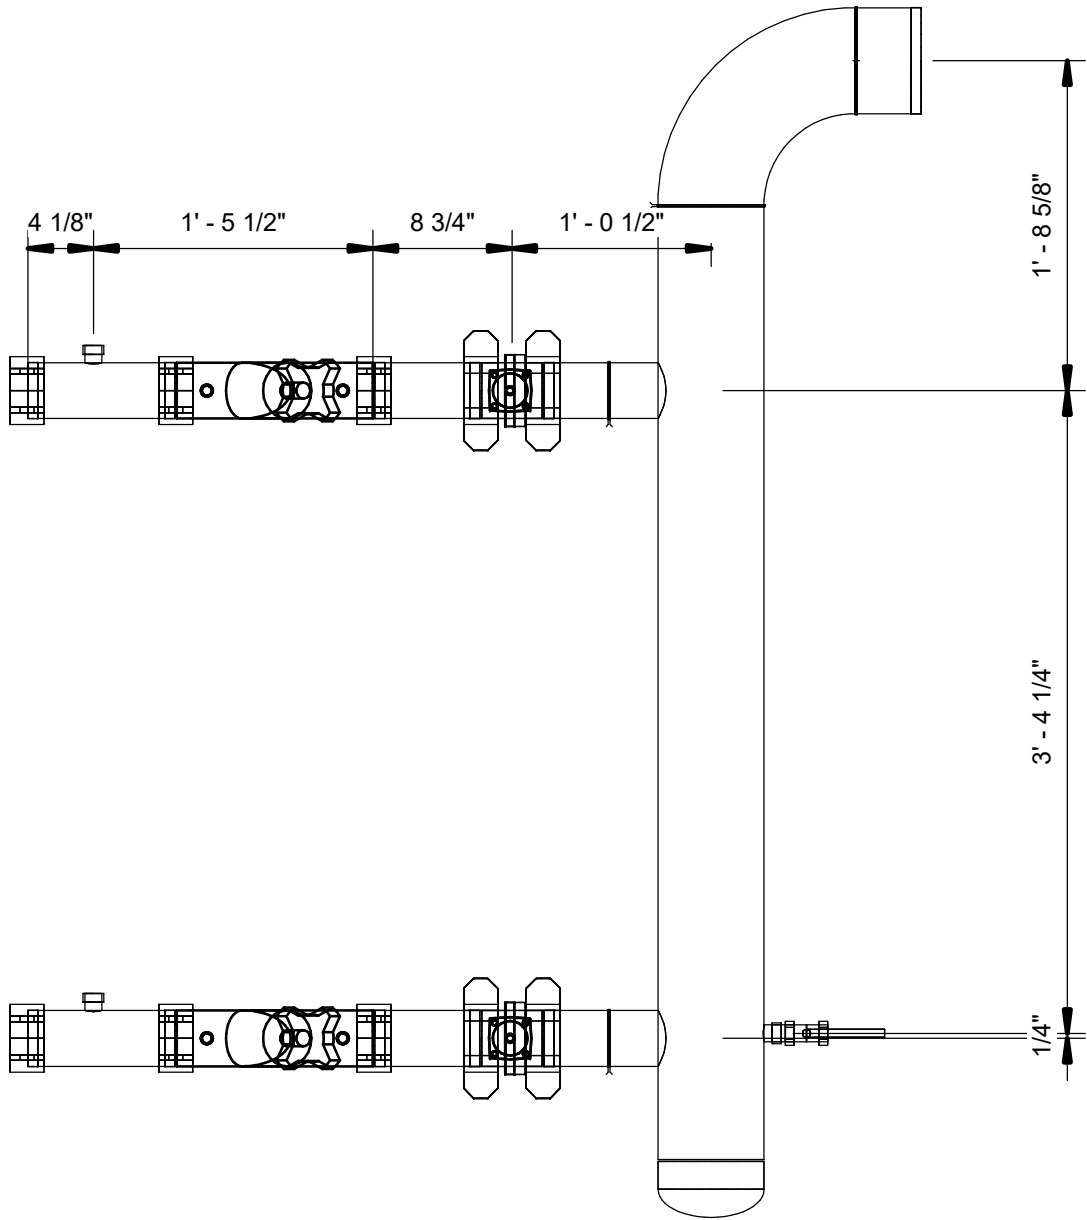

Elevation Back25
1" = 1'-0"

A1	A3	B1	B3
A2	A4	B2	B4

JOB:	WASH U NRB
TICKET:	AS-L02-283
Drawn By: Author	
DATE: 10/21/21	DATE REQ:

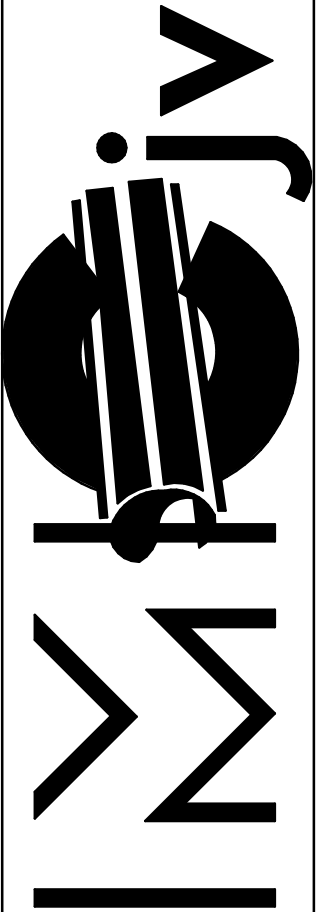

1233 N. Price Rd.
St. Louis, Mo 63132-2303
314-997-6600 phone