



BIM 360//WUSM NRBWUSM_RB_HPF.rvt
10/20/2021 3:23:10 PM

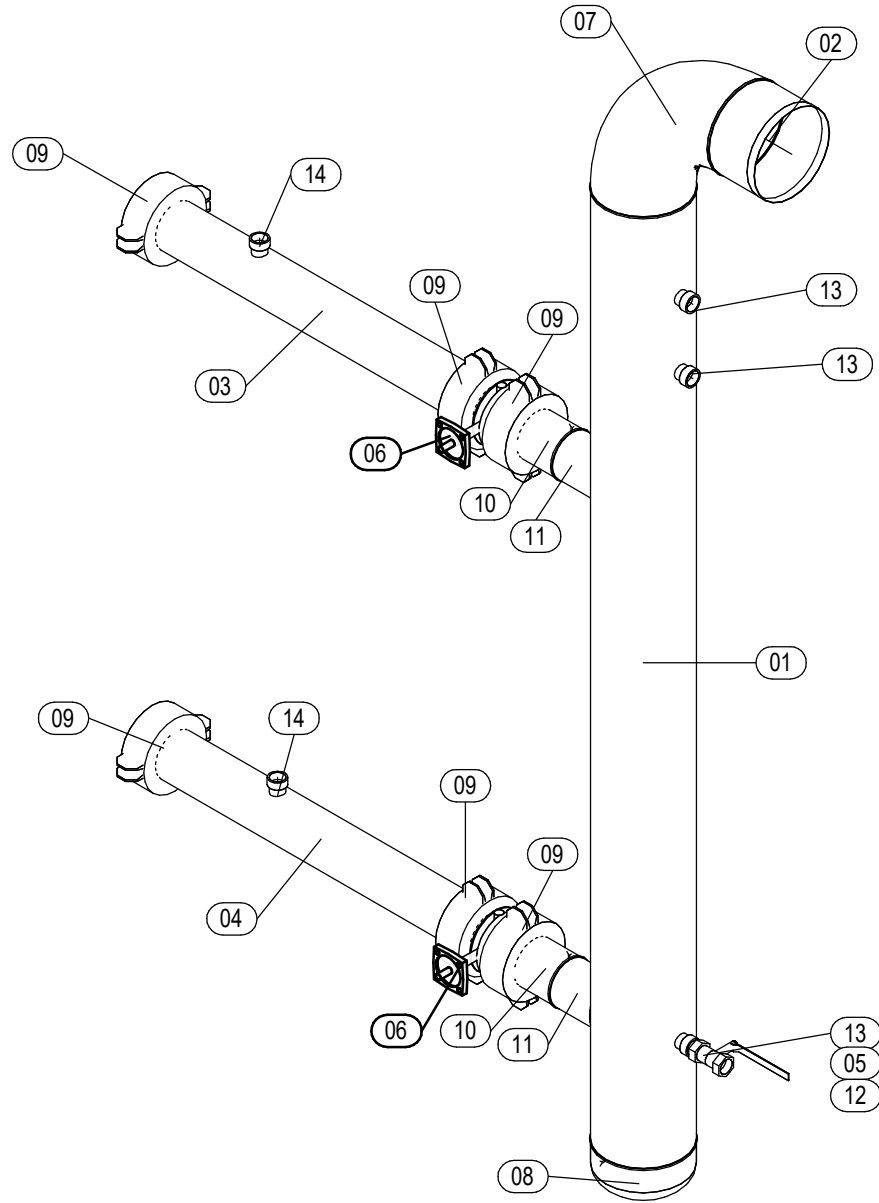

3D Ortho


Mark	Qty	Description	Size	Length	Insulation
01	1	Chicago Area Sch 40 SA-53B CS ERW Pipe PE	6"	6'-0 3/4"	1"
02	1	Chicago Area Sch 40 SA-53B CS ERW Pipe PE	6"	0'-4"	1"
03	1	Chicago Area Sch 40 SA-53B CS ERW Pipe PE	3"	2'-3 15/16"	1"
04	1	Chicago Area Sch 40 SA-53B CS ERW Pipe PE	3"	2'-3 11/16"	1"
05	1	Anvil Std SA-53B CS Smls Pipe NIP x Close	3/4"	0'-1 3/8"	1"
06	2	VIC-300 MASTERSEAL BUTTERFLY VALVE BARE	3"		0"
07	1	Weldbend Std Wt SA234 WPB CS BW LR 90 Deg Ell	6"		1"
08	1	Weldbend Std Wt SA234 WPB CS BW Cap	6"		1"
09	6	Victaulic Style 177 EHP QuickVic Flexible Coupling	3"		1"
10	2	Victaulic No 42 Adapter Nipple GrvxBev	3"		1"
11	2	Southern California Area Sch 40 SA-53B CS ERW Pipe Saddle	6"x3"		1"
12	1	Apollo 77C-140 Brz 2pc FP SS-Vntd-B&S Ball Valve Thd	3/4"		1"
13	3	Anvil 3000# FS Thread-O-Let	6"x3/4"		1"
14	2	Anvil 3000# FS Thread-O-Let	3"x3/4"		1"

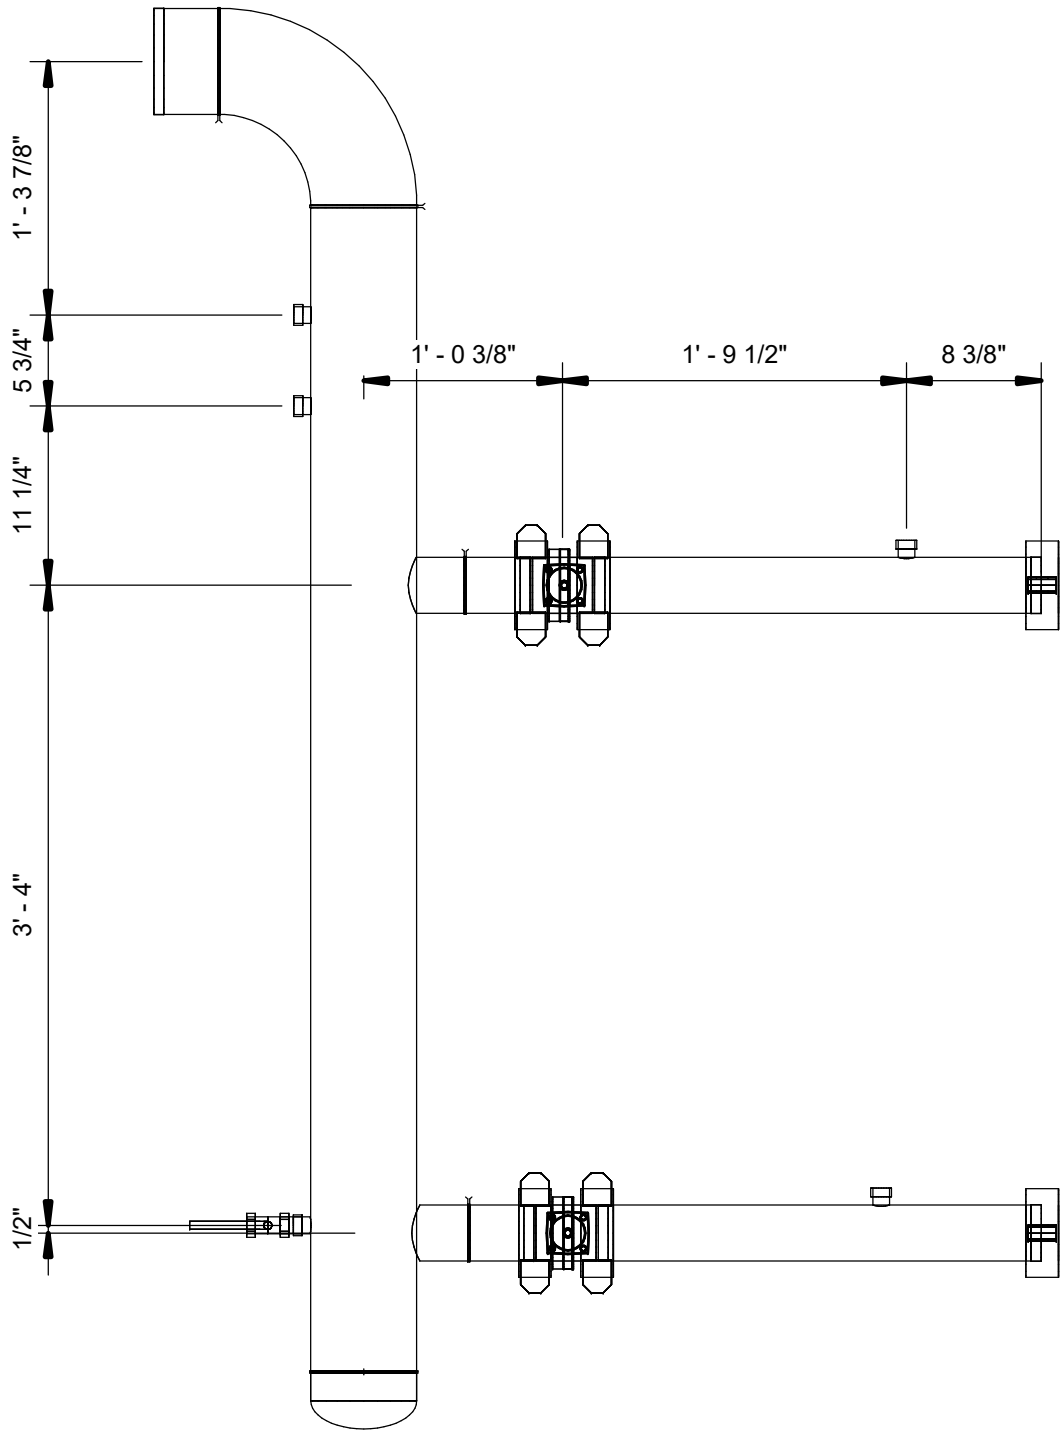

Elevation Back
1" = 1'-0"

A1	A3	B1	B3
A2	A4	B2	B4

JOB: WASH U NRB
TICKET: AS-L02-242
Drawn By: Author
DATE: 10/20/21
DATE REQ:

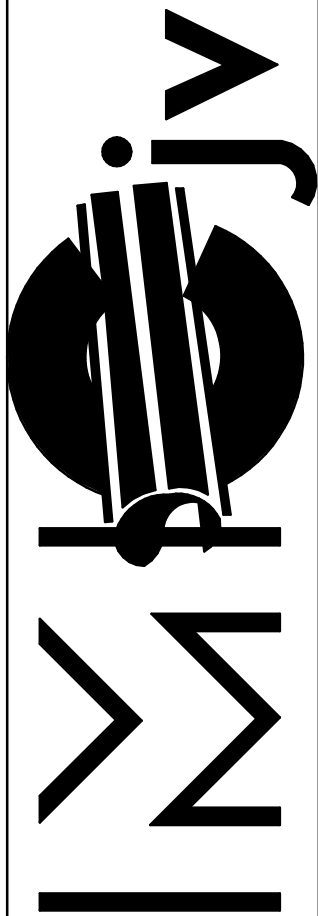

1233 N. Price Rd.
St. Louis, Mo 63132-2303
314-997-6600 phone