



BIM 360://WUSM NRBWUSM_RB_HPF.rvt
10/22/2021 8:25:22 AM

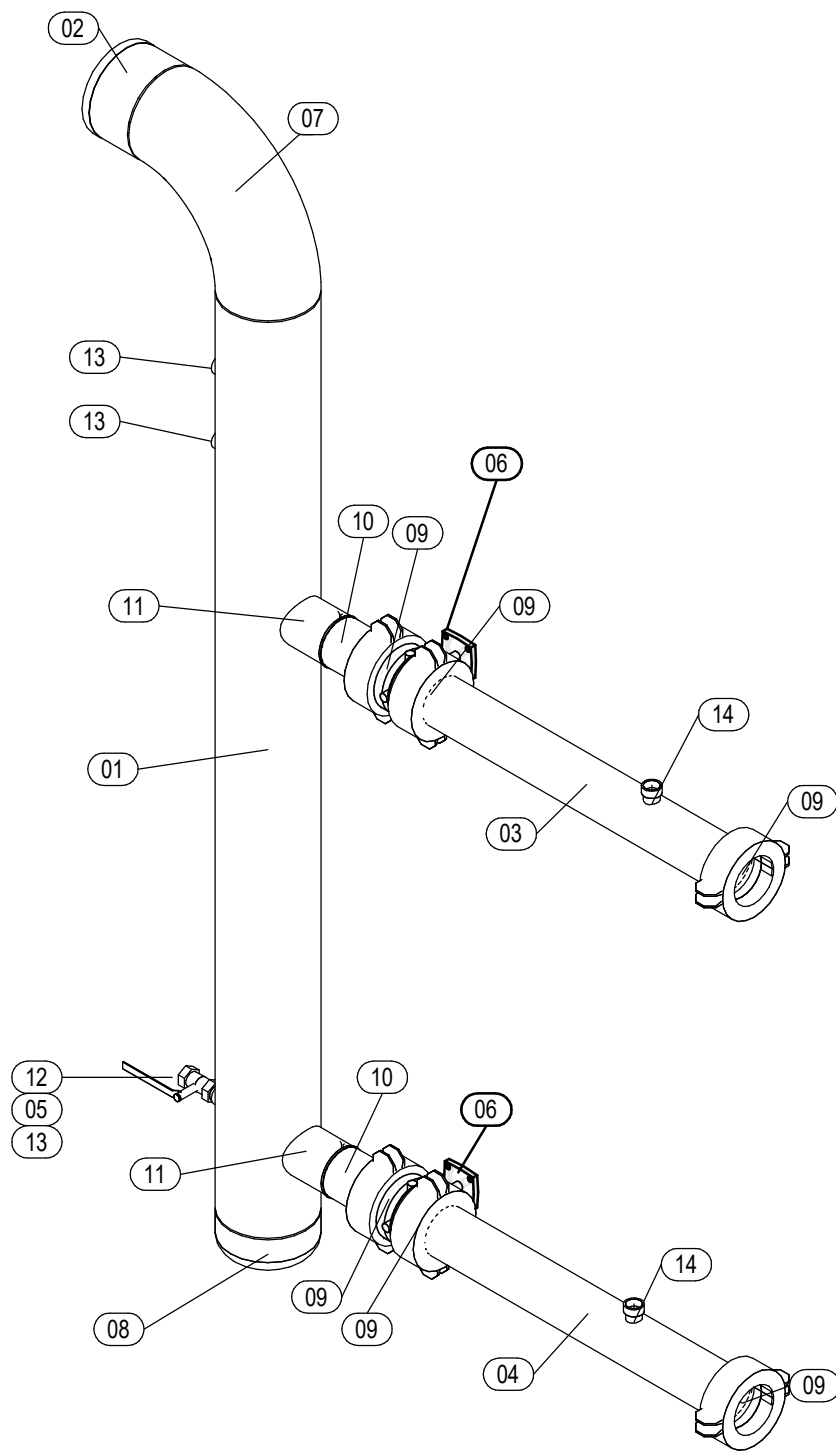

3D Ortho21

Mark	Qty	Description	Size	Length	Insulation
01	1	Chicago Area Sch 40 SA-53B CS ERW Pipe PE	6"	5'-10 1/8"	1"
02	1	Chicago Area Sch 40 SA-53B CS ERW Pipe PE	6"	0'-4"	1"
03	1	Chicago Area Sch 40 SA-53B CS ERW Pipe PE	3"	2'-3 7/16"	1"
04	1	Chicago Area Sch 40 SA-53B CS ERW Pipe PE	3"	2'-3 1/4"	1"
05	1	Anvil Std SA-53B CS Smls Pipe NIP x Close	3/4"	0'-1 3/8"	1"
06	2	VIC-300 MASTERSEAL BUTTERFLY VALVE BARE	3"		0"
07	1	Weldbend Std Wt SA234 WPB CS BW LR 90 Deg Ell	6"		1"
08	1	Weldbend Std Wt SA234 WPB CS BW Cap	6"		1"
09	6	Victaulic Style 177 EHP QuickVic Flexible Coupling	3"		1"
10	2	Victaulic No 42 Adapter Nipple GrvxBev	3"		1"
11	2	Southern California Area Sch 40 SA-53B CS ERW Pipe Saddle	6"x3"		1"
12	1	Apollo 77C-140 Brz 2pc FP SS-Vntd-B&S Ball Valve Thd	3/4"		1"
13	3	Anvil 3000# FS Thread-O-Let	6"x3/4"		1"
14	2	Anvil 3000# FS Thread-O-Let	3"x3/4"		1"

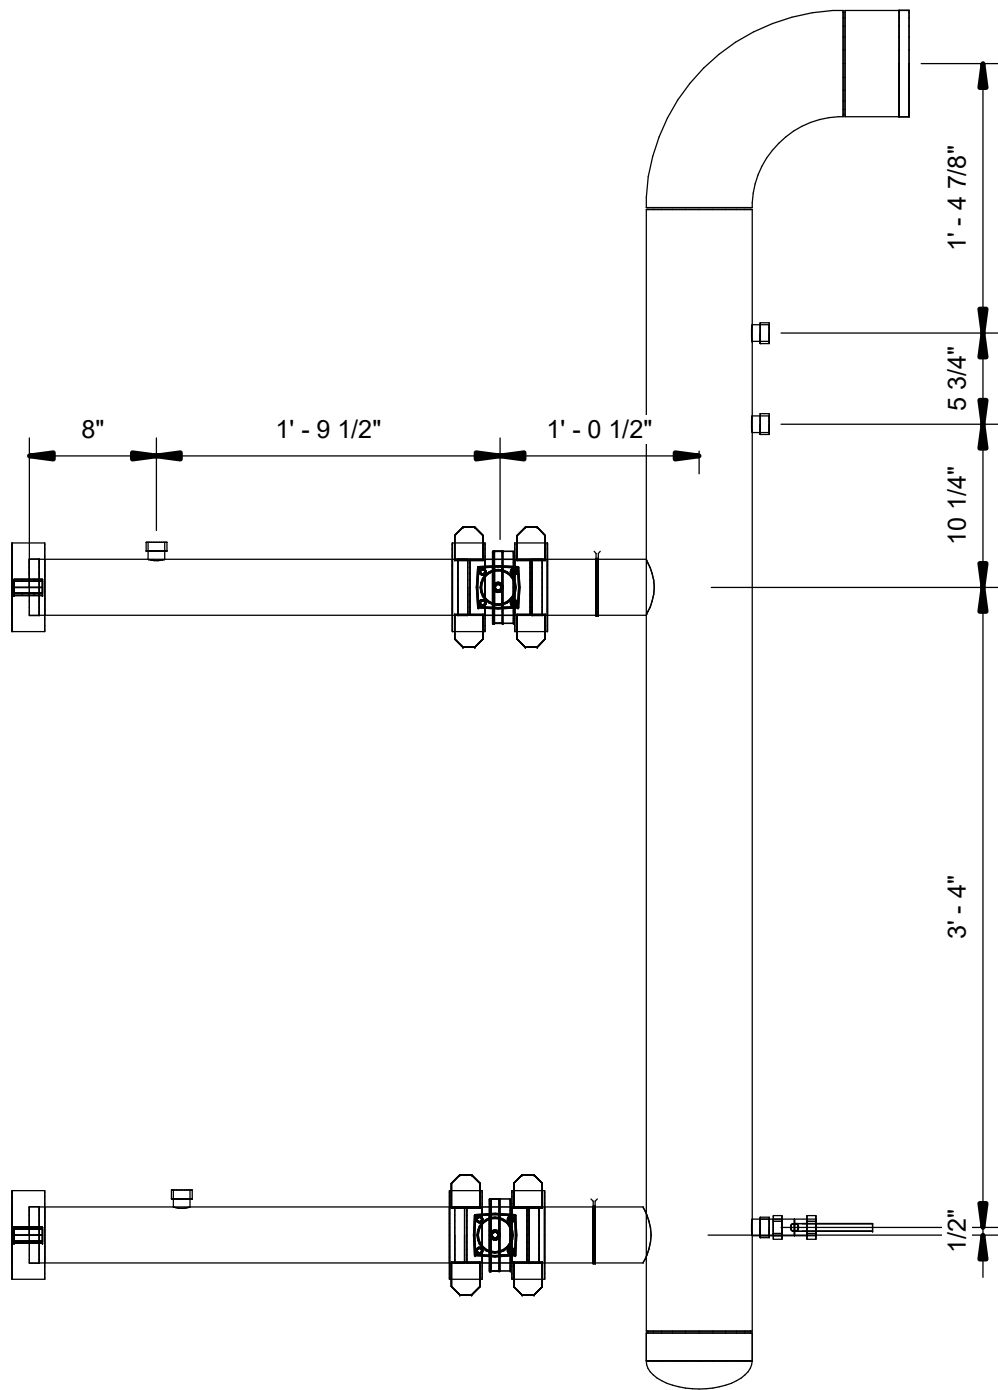

Elevation Back21
1" = 1'-0"


A1	A3	B1	B3
A2	A4	B2	B4

JOB: WASH U NRB

TICKET: AS-L02-279

Drawn By: Author

DATE REQ: 10/21/21

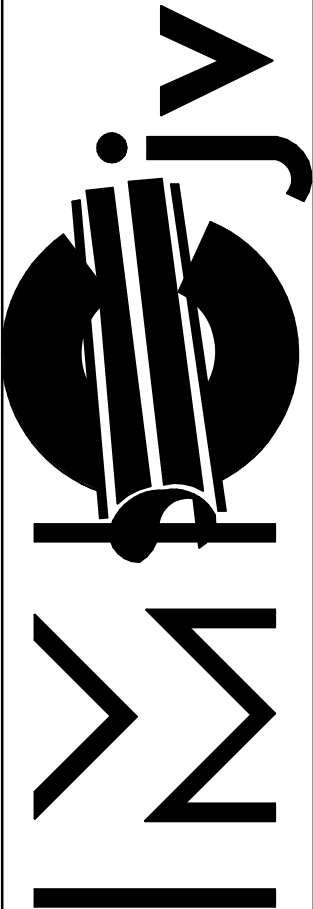

1233 N. Price Rd.
St. Louis, Mo 63132-2303
314-997-6600 phone