



BIM 360://WUSM NRBWUSM_RB_HPF.rvt
10/20/2021 11:30:49 AM

3D Ortho

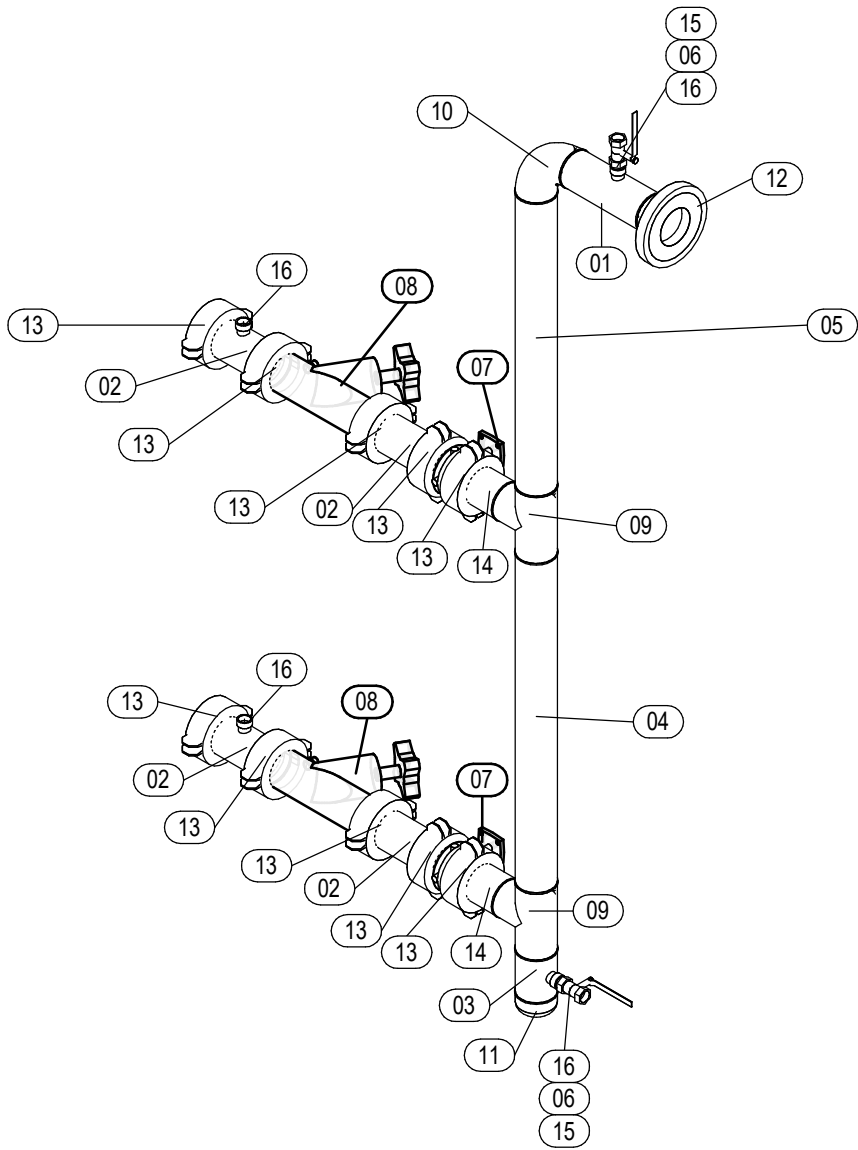

Mark	Qty	Description	Size	Length	Insulation
01	1	Chicago Area Sch 40 SA-53B CS ERW Pipe PE	3"	0'-8 7/8"	1"
02	4	Chicago Area Sch 40 SA-53B CS ERW Pipe PE	3"	0'-6 3/4"	1"
03	1	Chicago Area Sch 40 SA-53B CS ERW Pipe PE	3"	0'-4 1/4"	1"
04	1	Chicago Area Sch 40 SA-53B CS ERW Pipe PE	3"	2'-9 1/2"	1"
05	1	Chicago Area Sch 40 SA-53B CS ERW Pipe PE	3"	2'-5 13/16"	1"
06	2	Anvil Std SA-53B CS Smls Pipe NIP x Close	3/4"	0'-1 3/8"	1"
07	2	VIC-300 MASTERSEAL BUTTERFLY VALVE BARE	3"		0"
08	2	VIC TA CIRCUIT BALANCING VALVE SERIES 789 (GRVD)	3"		0"
09	2	Weldbend Std Wt SA234 WPB CS BW TEE	3"		1"
10	1	Weldbend Std Wt SA234 WPB CS BW LR 90 Deg Ell	3"		1"
11	1	Weldbend Std Wt SA234 WPB CS BW Cap	3"		1"
12	1	Weldbend 150lb RF Sch 40 Bore SA105 CS WN Flg	3"		1"
13	10	Victaulic Style 177 EHP QuickVic Flexible Coupling	3"		1"
14	2	Victaulic No 42 Adapter Nipple GrvxBev	3"		1"
15	2	Apollo 77C-140 Brz 2pc FP SS-Vntd-B&S Ball Valve Thd	3/4"		1"
16	4	Anvil 3000# FS Thread-O-Let	3"x3/4"		1"

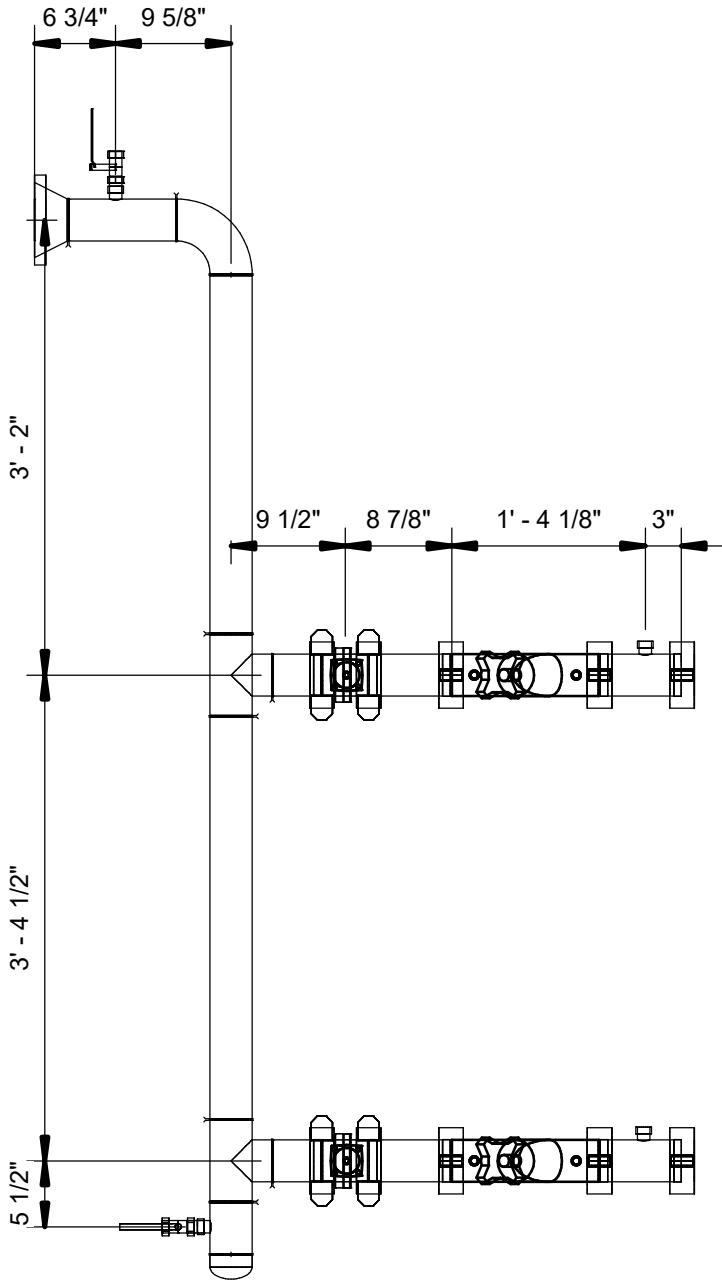

Elevation Back
3/4" = 1'-0"

A1	A3	B1	B3
A2	A4	B2	B4


JOB: WASH U NRB

TICKET: AS-L02-216

Drawn By: Author

DATE: 10/18/21

DATE REQ:

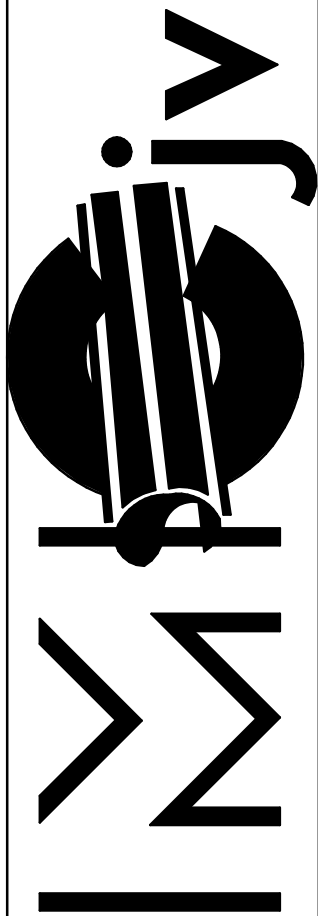

1233 N. Price Rd.
St. Louis, Mo 63132-2303
314-997-6600 phone