



BIM 360://WUSM NRBWUSM_RB_HPF.rvt
1/10/2022 3:04:51 PM

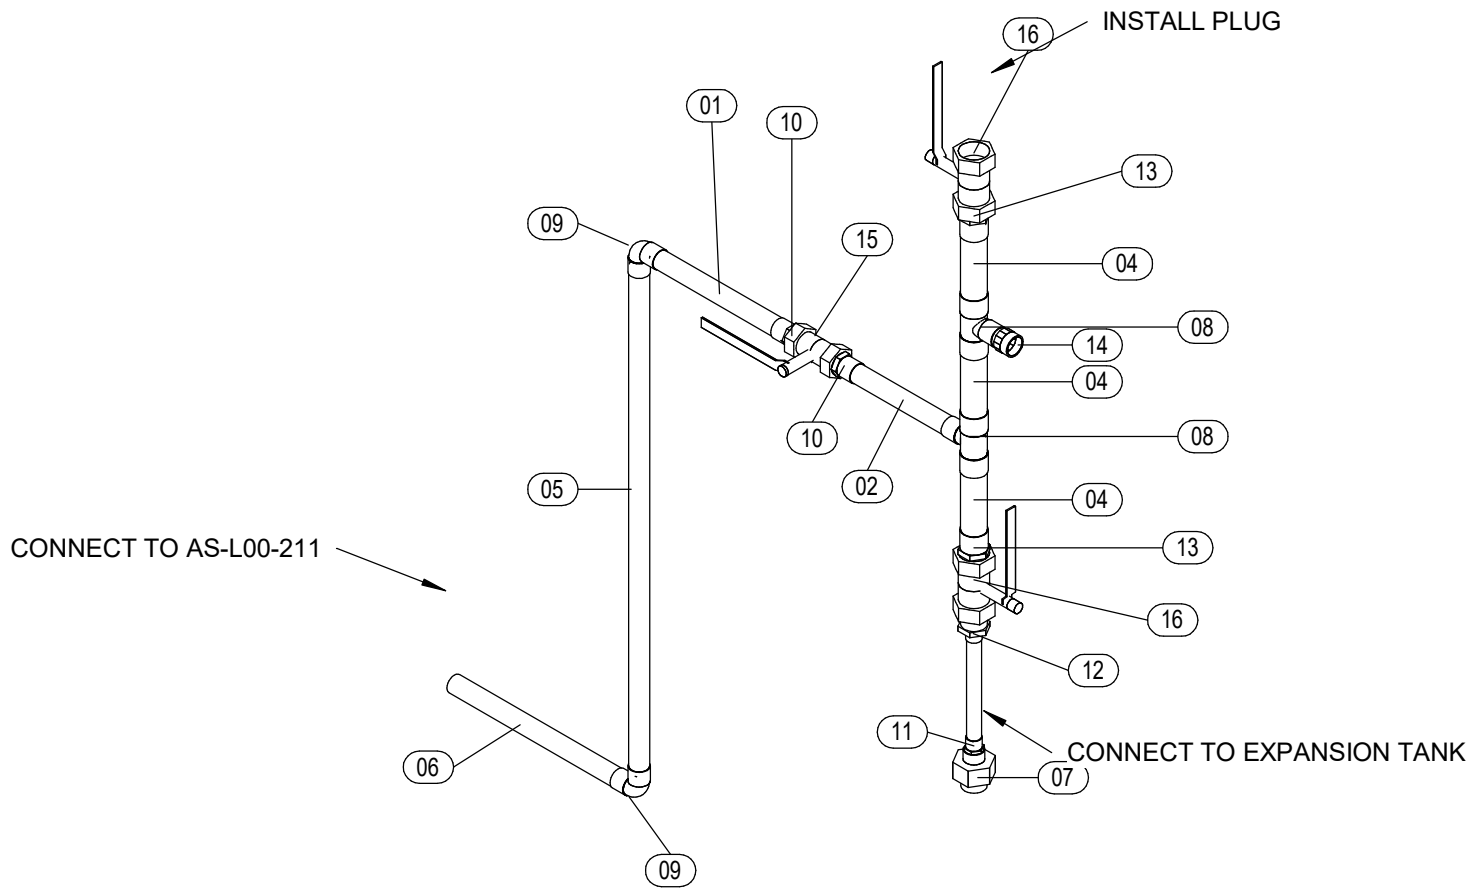

3D Ortho


Mark	Qty	Size	Description	Length	Insulation
01	1	3/4"	Cerro Type K Hard Copper Pipe	0'-8 1/2"	1"
02	1	3/4"	Cerro Type K Hard Copper Pipe	0'-6 7/8"	1"
03	1	1/2"	Cerro Type K Hard Copper Pipe	0'-6"	1"
04	3	1"	Cerro Type K Hard Copper Pipe	0'-4 7/8"	1"
05	1	3/4"	Cerro Type K Hard Copper Pipe	2'-2 3/4"	1"
06	1	3/4"	Cerro Type K Hard Copper Pipe	0'-10 3/8"	1"
07	1	1/2"	Watts FIPXCPR DIELECTRIC UNION		1"
08	2	1"x3/4"	Nibco Wrot 611R CxCxC Reducing Tee		1"
09	2	3/4"	Nibco Wrot 607 90 Deg Ell CxC		1"
10	2	3/4"	Nibco Wrot 604 Adapter CxM		1"
11	1	1/2"	Nibco Wrot 604 Adapter CxM		1"
12	1	1"x1/2"	Nibco Wrot 604 Adapter CxM		1"
13	2	1"	Nibco Wrot 604 Adapter CxM		1"
14	1	3/4"	Nibco Wrot 603-2 Ftg Adapter CxF		1"
15	1	3/4"	Apollo 77C-140 Brz 2pc FP SS-Vntd-B&S Ball Valve Thd		1"
16	2	1"	Apollo 77C-140 Brz 2pc FP SS-Vntd-B&S Ball Valve Thd		1"

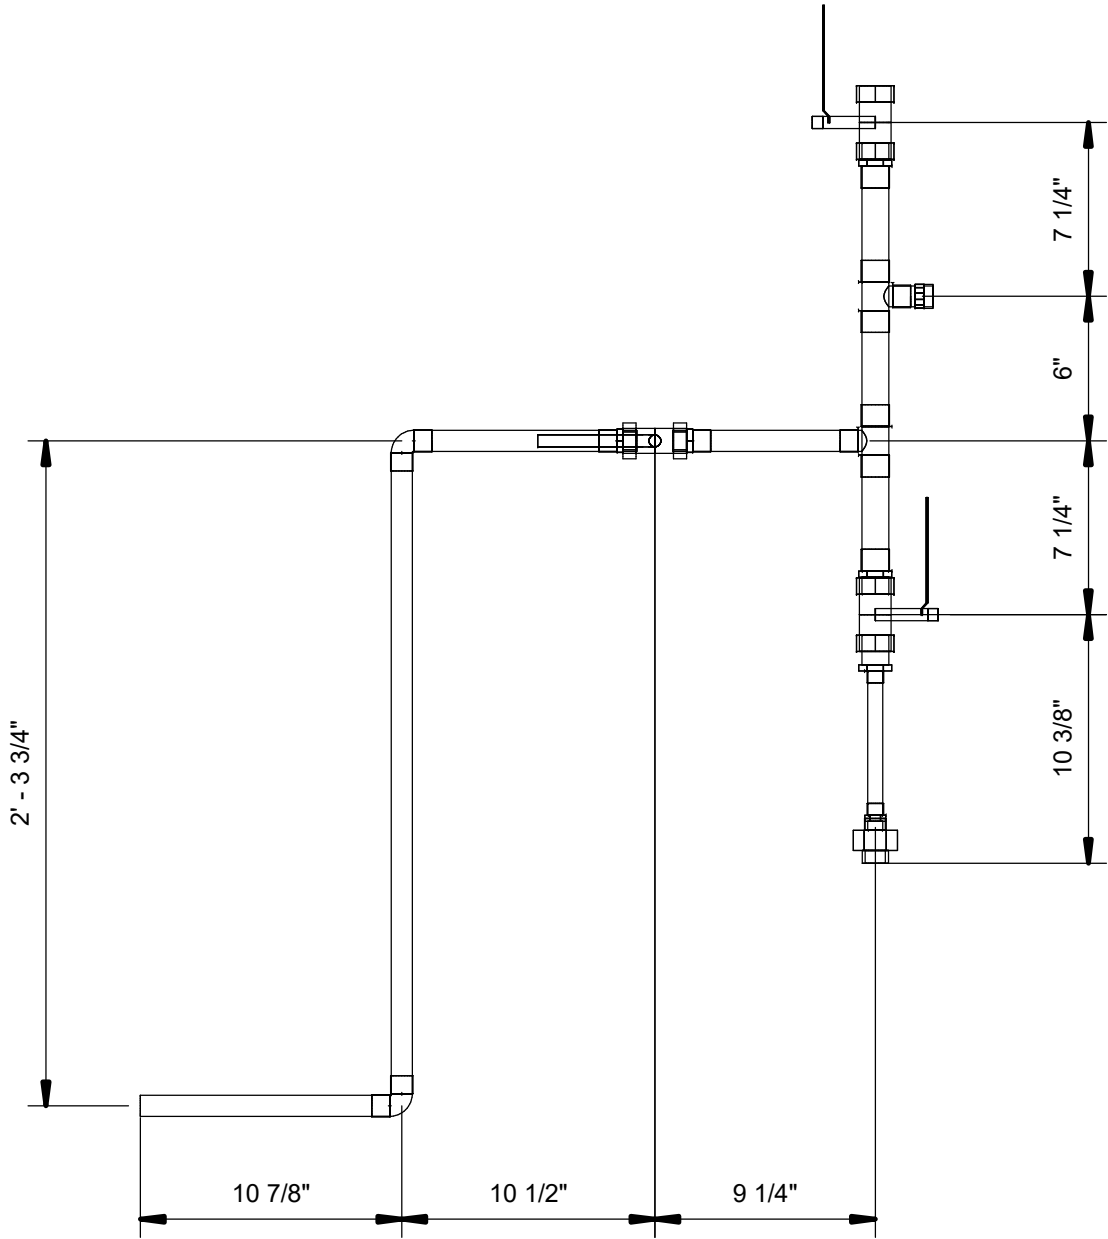

Elevation Front
1 1/2" = 1'-0"

A1	A3	B1	B3
A2	A4	B2	B4

JOB:	210140 - WASH U NRB
TICKET:	AS-L00-214
Drawn By: Author	
DATE: 11/10/21	DATE REQ:

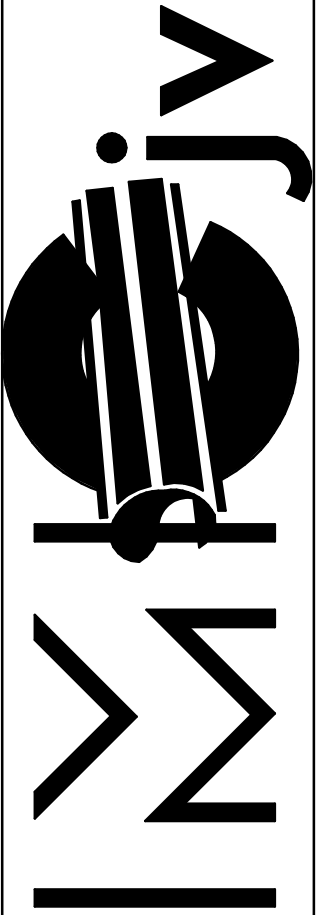

1233 N. Price Rd.
St. Louis, Mo 63132-2303
314-997-6600 phone