



BIM 360//WUSM NRBWUSM_RB_HPF.rvt
1/10/2022 3:06:46 PM


| Mark | Qty | Size | Description | Length | Insulation |
|------|-----|-------------|--|-----------|------------|
| 01 | 1 | 1/2" | Cerro Type K Hard Copper Pipe | 0'-9 3/8" | 1" |
| 02 | 1 | 1 1/2" | Cerro Type K Hard Copper Pipe | 0'-6 5/8" | 1 1/2" |
| 03 | 1 | 1 1/2" | Cerro Type K Hard Copper Pipe | 0'-3 5/8" | 1 1/2" |
| 04 | 1 | 1 1/2" | Cerro Type K Hard Copper Pipe | 0'-3" | 1 1/2" |
| 05 | 1 | 1/2" | Cerro Type K Hard Copper Pipe | 0'-2 3/8" | 1" |
| 06 | 1 | N/A | High Efficiency Large Wet Rotor Circulator with Single Phase Electronically Commutated Motor | | |
| 07 | 1 | 1 1/2"x1/2" | Nibco Wrot 611R CxCxC Reducing Tee | | 1 1/2" |
| 08 | 2 | 1/2" | Nibco Wrot 604 Adapter CxM | | 1" |
| 09 | 1 | 1 1/2" | Nibco Wrot 604 Adapter CxM | | 1 1/2" |
| 10 | 1 | 1 1/2" | Nibco T-433-Y Check Valve | | 1 1/2" |
| 11 | 1 | 1 1/2" | Nibco 150 lb 771 Cast Copper Companion Flg C | | 1 1/2" |
| 12 | 1 | 1/2" | Apollo 77C-140 Brz 2pc FP SS-Vntd-B&S Ball Valve Thd | | 1" |

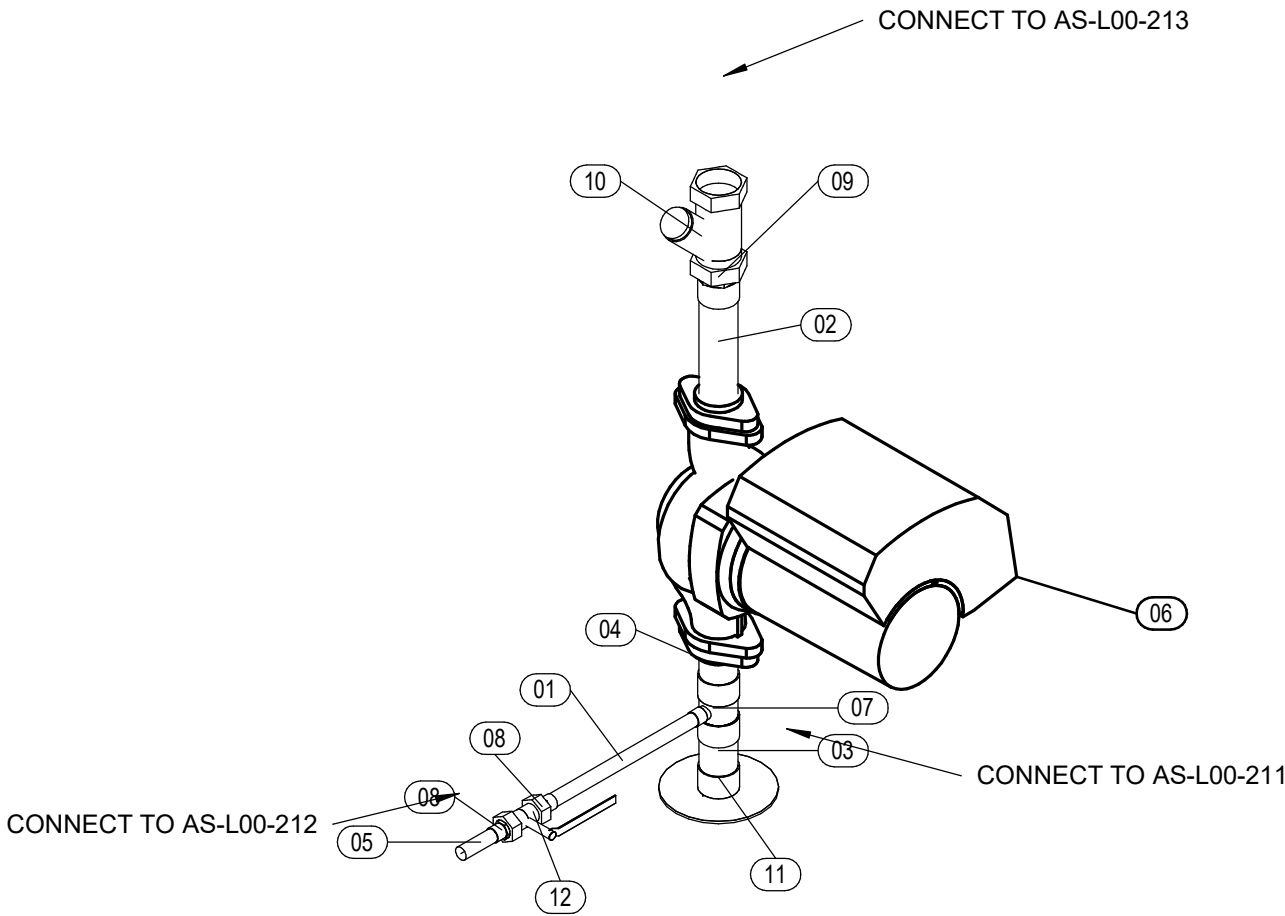

3D Ortho

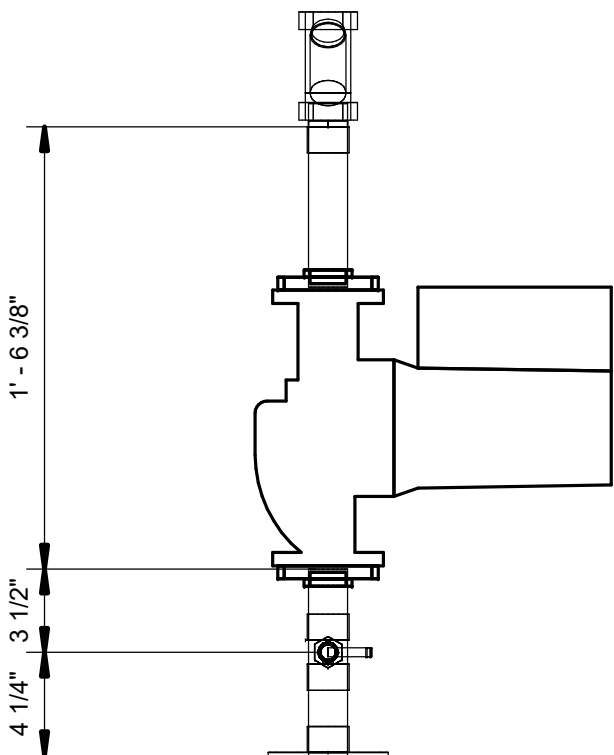

Elevation Front
1 1/2" = 1'-0"

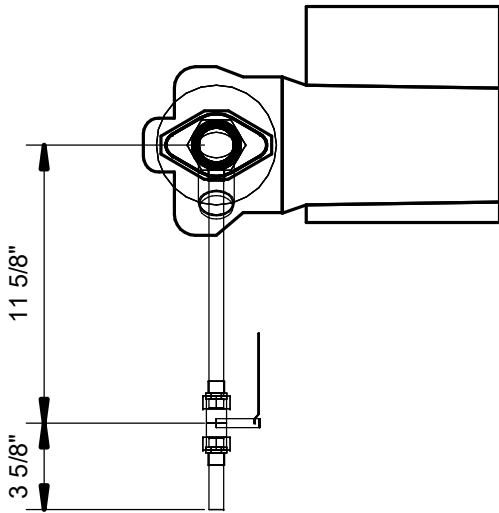

Elevation Top
1 1/2" = 1'-0"

| | | | |
|----|----|----|----|
| A1 | A3 | B1 | B3 |
| A2 | A4 | B2 | B4 |


JOB: 210140 - WASH U NRB

TICKET: AS-L00-222

Drawn By: Author

DATE: 11/23/21

DATE REQ:

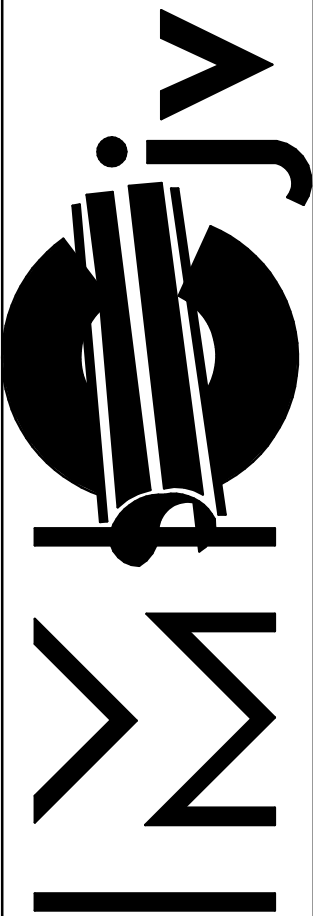

1233 N. Price Rd.
St. Louis, Mo 63132-2303
314-997-6600 phone